



US PTO
Jd135
09/31/2023
05/17/99

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 35.C 8117 DI
First Named Inventor or Application Identifier
TOMISHIGE TAGUCHI
Express Mail Label No.

Only for new nonprovisional applications under 37 CFR 1.53(b))

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification Total Pages
3. ☒ Drawing(s) (35 USC 113) Total Sheets
4. ☒ Oath or Declaration Total Pages
- a. ☐ Newly executed (original or copy)
- b. ☐ Unexecuted for information purposes
- c. ☒ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ DELETION OF INVENTOR(S)
Signed Statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☒ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☒ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☒ Other: Request for Drawing Changes

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☒ Divisional ☐ Continuation-in-part (CIP) of prior application No. 08/307,494

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label 05514 (Insert Customer No. or Attach bar code label here) or ☐ Correspondence address below

NAME				
Address				
City	State	Zip Code		
Country	Telephone	Fax		



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	130-20 =	110	X \$ 18.00 =	\$1980.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	8-3 =	5	X \$ 78.00 =	\$ 390.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
			Total of above Calculations = \$3130.00		
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$3,130.00

19. Small entity status


- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$3,130.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

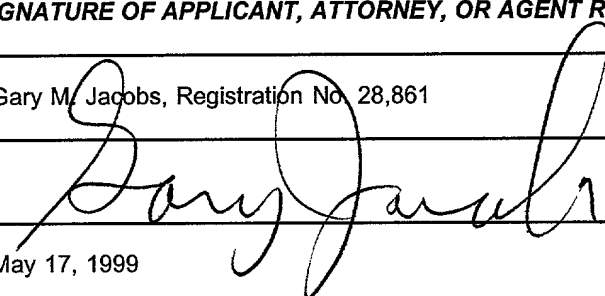SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Gary M. Jacobs, Registration No. 28,861
SIGNATURE	
DATE	May 17, 1999

35.C 8117 CI/DI

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
Divisional of Appln. No. 08/307,494 : Examiner: B. Peikari
)
 : Group Art Unit: 2752
Application No.: Not yet assigned)
 :
Filed: May 17, 1999)
 : May 17, 1999
For: ELECTRONIC APPARATUS)
 HAVING CONNECTING MEANS)

Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Prior to examination of the subject application, please amend the above-identified patent application as follows:

IN THE CLAIMS:

Please cancel Claims 1-8 without prejudice or disclaimer of the subject matter recited therein.

Please add Claims 9-139 as follows:

- 9. An information processing apparatus comprising:
- a connector for connecting an external device to said apparatus; and
- a central processing unit for executing a program for loading a device driver for the external device connected by said connector from the connected external device.
10. An apparatus according to claim 9, wherein the external device comprises a random access memory card.
11. An apparatus according to claim 9, wherein the external device comprises a read only memory card.
12. An apparatus according to claim 9, wherein the external device comprises an input/output card for inputting or outputting information between said information processing apparatus and another information processing apparatus.
13. An apparatus according to claim 9, wherein the external device comprises another information processing apparatus which is connected by said connector via an interface cable.
14. An apparatus according to claim 9, wherein the program executed by said central processing unit comprises an operating system.

15. An apparatus according to claim 9, wherein the loaded device driver comprises a program for controlling the external device connected by said connector.

16. An apparatus according to claim 9, wherein said central processing unit executed the loaded device driver to control the external device connected by said connector.

17. An apparatus according to claim 9, wherein said central processing unit executes the program when said apparatus is turned on.

18. An apparatus according to claim 9, wherein said central processing unit executes the program when the external apparatus is connected by said connector.

19. An apparatus according to claim 9, wherein said apparatus comprises a notebook personal computer.

20. An apparatus according to claim 9, wherein said apparatus comprises an electronic pocket book.

21. An apparatus according to claim 9, wherein said apparatus comprises an electronic camera.

22. An apparatus according to claim 9, wherein said apparatus comprises a facsimile apparatus.

23. An apparatus according to claim 9, wherein said connector has 68 signal pins.

24. An apparatus according to claim 9, further comprising a memory for storing the loaded device driver.

25. An apparatus according to claim 9, further comprising a memory for storing the program.

26. An apparatus according to claim 9, further comprising a display for displaying a character.

27. An apparatus according to claim 9, further comprising a keyboard for inputting a character.

28. An information processing apparatus comprising:
connector means for connecting an external device to said apparatus; and
loading means for loading a device driver for the external device connected by said connector means from the connected external device.

29. An apparatus according to claim 28, wherein the external device comprises a random access memory card.

30. An apparatus according to claim 28, wherein the external device comprises a read only memory card.

31. An apparatus according to claim 28, wherein the external device comprises an input/output card for inputting or outputting information between said information processing apparatus and another information processing apparatus.

32. An apparatus according to claim 28, wherein the external device comprises another information processing apparatus which is connected by said connector means via an interface cable.

33. An apparatus according to claim 28, wherein said loading means loads the device driver in accordance with an operating system for loading the device driver for the external device from the external device.

34. An apparatus according to claim 28, wherein the loaded device driver comprises a program for controlling the external device connected by said connector means.

35. An apparatus according to claim 28, further comprising means for executing the loaded device driver to control the external device connected by said connector means.

36. An apparatus according to claim 28, wherein said loading means loads the device driver when said apparatus is turned on.

37. An apparatus according to claim 28, wherein said loading means loads the device driver when the external apparatus is connected by said connector means.

38. An apparatus according to claim 28, wherein said apparatus comprises a notebook personal computer.

39. An apparatus according to claim 28, wherein said apparatus comprises an electronic pocket book.

40. An apparatus according to claim 28, wherein said apparatus comprises an electronic camera.

41. An apparatus according to claim 28, wherein said apparatus comprises a facsimile apparatus.

42. An apparatus according to claim 28, wherein said connector has 68 signal pins.

43. An apparatus according to claim 28, further comprising a memory for storing the loaded device driver.

44. An apparatus according to claim 28, further comprising a display for displaying a character.

45. An apparatus according to claim 28, further comprising a keyboard for inputting a character.

46. A storage medium used in an information processing apparatus including a connector, said storage medium comprising storage means for storing a program for loading a device driver for an external device connected to the information processing apparatus by the connector from the connected external device.

47. A storage medium according to claim 46, wherein the external device comprises a random access memory card.

48. A storage medium according to claim 46, wherein the external device comprises a read only memory card.

49. A storage medium according to claim 46, wherein the external device comprises an input/output card for inputting or outputting information between said information processing apparatus and another information processing apparatus.

50. A storage medium according to claim 46, wherein the external device comprises another information processing apparatus which is connected by said connector via an interface cable.

51. A storage medium according to claim 46, wherein the program stored in said storage means comprises an operating system.

52. A storage medium according to claim 46, wherein the loaded device driver comprises a program for controlling the external device connected by the connector.

53. A storage medium according to claim 46, wherein the program stored in said storage means is executed when the information processing apparatus is turned on.

54. A storage medium according to claim 46, wherein the program stored in said storage means is executed when the external apparatus is connected by the connector.

55. A storage medium according to claim 46, wherein the information processing apparatus comprises a notebook personal computer.

56. A storage medium according to claim 46, wherein the information processing apparatus comprises an electronic pocket book.

57. A storage medium according to claim 46, wherein the information processing apparatus comprises an electronic camera.

58. A storage medium according to claim 46, wherein the information processing apparatus comprises a facsimile apparatus.

59. A storage medium according to claim 46, wherein the connector has 68 signal pins.

60. A storage medium according to claim 46, wherein the information processing apparatus further comprises a memory for storing the loaded device driver.

61. A storage medium according to claim 46, wherein the information processing apparatus further comprises a display for displaying a character.

62. A storage medium according to claim 46, wherein the information processing apparatus further comprises a keyboard for inputting a character.

63. An information processing method carried out in an information processing apparatus having a connector for connecting an external device to the apparatus, said method comprising the steps of:

discriminating the type of the external device connected to the apparatus by the connector; and

executing a program for loading a device driver for the external device connected by the connector from the connected external device.

64. A method according to claim 63, wherein the external device comprises a random access memory card.

65. A method according to claim 63, wherein the external device comprises a read only memory card.

⁶⁶
~~65~~. A method according to claim 63, wherein the external device comprises an input/output card for inputting or outputting information between the information processing apparatus and another information processing apparatus.

67. A method according to claim 63, wherein the external device comprises another information processing apparatus which is connected by the connector via an interface cable.

68. A method according to claim 63, wherein the program executed in said executing step comprises an operating system.

69. A method according to claim 63, wherein the loaded device driver comprises a program for controlling the external device connected by the connector.

70. A method according to claim 63, wherein said executing step operates the loaded device driver to control the external device connected by the connector.

71. A method according to claim 63, wherein said executing step executes the program when the apparatus is turned on.

72. A method according to claim 63, wherein said executing step executes the program when the external device is connected by the connector.

73. A method according to claim 63, wherein the apparatus comprises a notebook personal computer.

74. A method according to claim 63, wherein the apparatus comprises an electronic pocket book.

75. A method according to claim 63, wherein the apparatus comprises an electronic camera.

76. A method according to claim 63, wherein the apparatus comprises a facsimile apparatus.

77. A method according to claim 63, wherein the connector has 68 signal pins.

78. A method according to claim 63, further comprising the step of storing the loaded device driver.

79. A method according to claim 63, further comprising the step of displaying a character.

80. A method according to claim 63, further comprising the step of inputting a character.

81. An information processing method carried out in an information processing apparatus having a connector for connecting an external device to the apparatus, said method comprising the steps of:

discriminating the type of the external device connected to the apparatus by the connector; and

loading a device driver for the external device connected by the connector from the connected external device.

82. A method according to claim 81, wherein the external device comprises a random access memory card.

83. A method according to claim 81, wherein the external device comprises a read only memory card.

84. A method according to claim 81, wherein the external device comprises an input/output card for inputting or outputting information between the information processing apparatus and another information processing apparatus.

85. A method according to claim 81, wherein the external device comprises another information processing apparatus which is connected by the connector via an interface cable.

86. A method according to claim 81, wherein said loading step loads the device driver in accordance with an operating system for loading the device driver for the external device from the external device.

87. A method according to claim 81, wherein the loaded device driver comprises a program for controlling the external device connected by the connector.

88. A method according to claim 81, further comprising the step of operating the loaded device driver to control the external device connected by the connector.

89. A method according to claim 81, wherein said loading step loads the device driver when the apparatus is turned on.

90. A method according to claim 81, wherein said loading step loads the device driver when the external device is connected by the connector.

91. A method according to claim 81, wherein the apparatus comprises a notebook personal computer.

92. A method according to claim 81, wherein the apparatus comprises an electronic pocket book.

93. A method according to claim 81, wherein the apparatus comprises an electronic camera.

94. A method according to claim 81, wherein the apparatus comprises a facsimile apparatus.

95. A method according to claim 81, wherein the connector has 68 signal pins.

96. A method according to claim 81, further comprising the step of storing the loaded device driver.

97. A method according to claim 81, further comprising the step of displaying a character.

98. A method according to claim 81, further comprising the step of inputting a character.

99. An information processing apparatus comprising:
connecting means for connecting an external device to said apparatus; and
storage means for storing a device driver for the external device connected by said connecting means and loaded from the connected external device.

100. An apparatus according to claim 99, wherein the external device comprises a random access memory card.

101. An apparatus according to claim 99, wherein the external device comprises a read only memory card.

102. An apparatus according to claim 99, wherein the external device comprises an input/output card for inputting or outputting information between said information processing apparatus and another information processing apparatus.

103. An apparatus according to claim 99, wherein the external device comprises another information processing apparatus which is connected by said connecting means via an interface cable.

104. An apparatus according to claim 99, wherein the device driver stored in said storage means comprises a program for controlling the external device connected by said connecting means.

105. An apparatus according to claim 99, wherein the device driver is loaded in said storage means when said apparatus is turned on.

106. An apparatus according to claim 99, wherein the device driver is loaded in a memory when the external apparatus is connected by said connecting means.

107. An apparatus according to claim 99, wherein said apparatus comprises a notebook personal computer.

108. An apparatus according to claim 99, wherein said apparatus comprises an electronic pocket book.

109. An apparatus according to claim 99, wherein said apparatus comprises an electronic camera.

¹¹⁰
100. An apparatus according to claim 99, wherein said apparatus comprises a facsimile apparatus.

¹¹¹
101. An apparatus according to claim 99, wherein said connecting means has 68 signal pins.

¹¹²
102. An apparatus according to claim 99, further comprising display means for displaying a character.

¹¹³
~~103~~. An apparatus according to claim 99, further comprising input means for inputting a character.

¹¹⁴
~~104~~. A storage medium for storing a program used in an information processing apparatus having a connector for connecting an external device to the apparatus, the program performing the steps of:

discriminating the type of the external device connected to the apparatus by the connector; and

executing a program for loading a device driver for the external device connected by the connector from the connected external device.

¹¹⁵
~~105~~. A storage medium according to claim 104, wherein the external device comprises a random access memory card.

¹¹⁶
~~106~~. A storage medium according to claim 104, wherein the external device comprises a read only memory card.

¹¹⁷
~~107~~. A storage medium according to claim 104, wherein the external device comprises an input/output card for inputting or outputting information between the information processing apparatus and another information processing apparatus.

¹¹⁸
108. A storage medium according to claim 104, wherein the external device comprises another information processing apparatus which is connected by the connector via an interface cable.

¹¹⁹
109. A storage medium according to claim 104, wherein the program executed in said executing step comprises an operating system.

¹²⁰
110. A storage medium according to claim 104, wherein the loaded device driver comprises a program for controlling the external device connected by the connector.

¹²¹
111. A storage medium according to claim 104, wherein said executing step operates the device driver to control the external device connected by the connector.

¹²²
112. A storage medium according to claim 104, wherein said executing step executes the program when the apparatus is turned on.

¹²³
113. A storage medium according to claim 104, wherein said executing step executes the program when the external device is connected by the connector.

¹²⁴
114. A storage medium according to claim 104, wherein the apparatus comprises a notebook personal computer.

¹²⁵

115. A storage medium according to claim 104, wherein the apparatus comprises an electronic pocket book.

¹²⁶

116. A storage medium according to claim 104, wherein the apparatus comprises an electronic camera.

¹²⁷

117. A storage medium according to claim 104, wherein the apparatus comprises a facsimile apparatus.

¹²⁸

118. A storage medium according to claim 104, wherein the connector has 68 signal pins.

¹²⁹

119. A storage medium according to claim 104, wherein the program performs the step of storing the loaded device driver.

¹³⁰

120. A storage medium according to claim 104, wherein the program performs the step of displaying a character.

¹³¹

121. A storage medium according to claim 104, wherein the program performs the step of inputting a character.

132

~~122.~~ A storage medium for storing a program used in an information processing apparatus having a connector for connecting an external device to the apparatus, the program performing the steps of:

discriminating the type of the external device connected to the apparatus by the connector; and

loading a device driver for the external device connected by the connector from the connected external device.

133

~~123.~~ A storage medium according to claim 122, wherein the external device comprises a random access memory card.

134

~~124.~~ A storage medium according to claim 122, wherein the external device comprises a read only memory card.

135

~~125.~~ A storage medium according to claim 122, wherein the external device comprises an input/output card for inputting or outputting information between the information processing apparatus and another information processing apparatus.

136

~~126.~~ A storage medium according to claim 122, wherein the external device comprises another information processing apparatus which is connected by the connector via an interface cable.

137

127. A storage medium according to claim 122, wherein said loading step loads the device driver in accordance with an operating system for loading the device driver for the external device from the external device.

138

128. A storage medium according to claim 122, wherein the loaded device driver comprises a program for controlling the external device connected by the connector.

139

129. A storage medium according to claim 122, wherein the program further performs the step of operating the loaded device driver to control the external device connected by the connector.

140

130. A storage medium according to claim 122, wherein said loading step loads the device driver when the apparatus is turned on.

141

131. A storage medium according to claim 122, wherein said loading step loads the device driver when the external device is connected by the connector.

142

132. A storage medium according to claim 122, wherein the apparatus comprises a notebook personal computer.

¹⁴³

133. A storage medium according to claim 122, wherein the apparatus comprises an electronic pocket book.

¹⁴⁴

134. A storage medium according to claim 122, wherein the apparatus comprises an electronic camera.

¹⁴⁵

135. A storage medium according to claim 122, wherein the apparatus comprises a facsimile apparatus.

¹⁴⁶

136. A storage medium according to claim 122, wherein the connector has 68 signal pins.

¹⁴⁷

137. A storage medium according to claim 122, wherein the program performs the step of storing the loaded device driver.

¹⁴⁸

138. A storage medium according to claim 122, wherein the program further performs the step of displaying a character.

¹⁴⁹

139. A storage medium according to claim 122, wherein the program further performs the step of inputting a character.--.


REMARKS

The present application is a divisional application of parent application 08/307,494. Claims 1-8 have been cancelled without prejudice. Claims 9-139 have been added to recite additional novel features of the present application. Claims 9, 28, 46, 63, 81, 99, 104, and 122 are independent.

Consideration and an early allowance are respectfully solicited.

Applicants' undersigned attorney may be reached in our Washington D.C. office by telephone at (202) 530-1010. All correspondence should be directed to our new address given below.

Respectfully submitted,

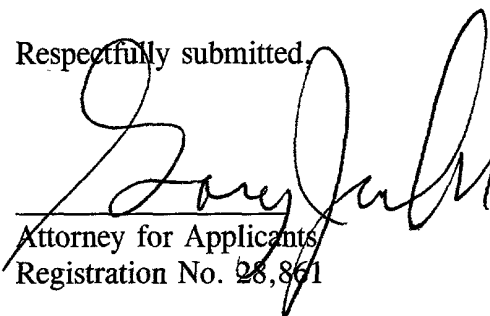

Attorney for Applicants
Registration No. 28,861

FITZPATRICK, CELLA, HARPER & SCINTO
30 Rockefeller Plaza
New York, New York 10112-3801
Facsimile: (212) 758-2982
(212) 218-220- (From June 29, 1998)

F505/W182319/GMJ/jlm

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Divisional Application of:)
Divisional of Appln. No. 08/307,494 :
)
) Examiner: Unassigned
TOMISHIGE TAGUCHI)
) Group Art Unit: Unassigned
Application No.: not yet assigned)
 :
Filed: May 17, 1999)
 :
For: ELECTRONIC APPARATUS) May 17, 1999
HAVING CONNECTING MEANS :
)
 :
)

The Assistant Commissioner for Patents
Washington, D.C. 20231


REQUEST FOR DRAWING CHANGES

Sir:

Please amend Figs. 8 and 9 by adding the legend --PRIOR ART--, thereto., as shown in red on the attached drawings.

Applicant's undersigned attorney may be reached in our Washington D.C. office by telephone at (202) 530-1010. All correspondence should continue to be directed to our below listed address.

Respectfully submitted,

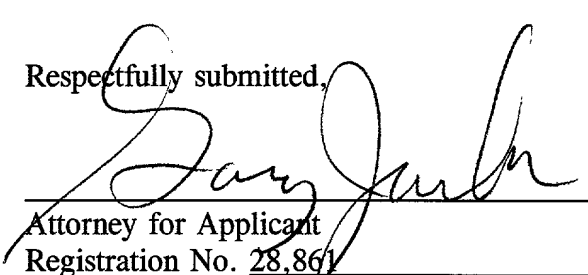

Attorney for Applicant
Registration No. 28,861

FITZPATRICK, CELLA, HARPER & SCINTO
30 Rockefeller Plaza
New York, New York 10112-3801
Facsimile No.: (212) 218-2200
F505/W182319/GMJ/jlm

- 1 -

1 Electronic Apparatus Having Connecting Means

BACKGROUND OF THE INVENTIONField of the Invention

5 The invention relates to an electronic apparatus and, more particularly, to an electronic apparatus in which a detachable IC card is connected to an IC card junction portion and a CPU bus of the electronic apparatus main body is connected to the
10 IC card by the junction portion and the IC card is used as an external memory device.

Related Background Art

 Fig. 8 shows an external view of a conventional data processing apparatus such as personal computer,
15 word processor, or the like and an IC card which is used as a small external memory device for the data processing apparatus.

 A construction of a data processing apparatus 90 shown in Fig. 8 is used in a word processor, a
20 personal computer, or the like and has a display 68 comprising an LCD panel or the like and a keyboard 86 as user interface means. The apparatus 90 also has an IC card 50 as an external memory device. Reference numeral 91 denotes an eject lever to remove the IC card
25 50.

 As shown in Fig. 9, a control system of the data processing apparatus 90 comprises: a CPU 65;

1 various control circuits which are connected to a
data/address bus of the CPU 65; the display 68; a
power source (P/S) section 84; and the key input
section 86.

5 The IC card 50 is connected through an IC
card connector 60 in a slot which is formed in the
side wall of the keyboard 86 in Fig. 8.

The IC card is used as a memory area to store
processing data of the apparatus main body, operation
10 data or KANJI (Chinese characters) font data which has
already been stored in the card, or data of utility
softwares, or the like.

A plurality of read only memories (ROMs) 54
and a plurality of random access memories (RAMs) 55
15 are enclosed in the IC card 50 and are connected to
the IC card connector 60 through a buffer 53 and a
junction portion 51 by an address/data/control bus 56.

The address/data/control bus of the data
processing apparatus 90 and signal lines of a power
20 source and the like are also connected from the
apparatus main body to the IC card connector 60 through
a buffer 62 as necessary as shown in Fig. 10. The
signal is connected to the IC card 50 by the connector.

To the address/data/control bus of the CPU
25 65, there are connected: a KANJI (or Chinese
characters) ROM 69; a DMA controller 70; an RAM 82;
an ROM 83; a timer 81; an I/O controller 71; a display

00342823 054759
054759 00342823

1 controller 66 to control the input/output operation
for the display 68 and keyboard 86; a key input
controller 85; and the like.

5 An external expansion bus connector 89 is
provided on the rear wall (not shown in Fig. 8) of
the main body. A hard disc or an external control
unit can be connected to the external expansion bus
connector 89 through an exclusive control board and
can be used to expand the external memory or to
10 control the apparatus.

In recent years, the realization of miniaturization of the apparatus is more and more progressed. In the apparatus as mentioned above, it is becoming impossible to provide a space enough to attach both
15 of the connector 60 for the IC memory and the external expansion bus connector 89. For instance, there are also commercially available a portable data processing apparatus and the like such as IC card system pocket-book, IC card electronic calculator, and the like
20 having a small space only for providing a connector terminal for the IC card.

On the other hand, in such an apparatus as well, a high function such as a high processing speed to input/output data from/to an external apparatus or
25 the like is required similarly to the case of a desktop type personal computer or the like.

As mentioned above, however, in recent years,

05312823 054759

09342823 051739
007450 228260

1 it is difficult to assure an installation space of
the connector to input/output for an external device.
In the conventional construction, there is a case of
using a countermeasure such that the control of the
5 external device and data input/output operation are
executed or the like by using a serial communication
connector. This is because an installation space
for the serial communication connector is smaller
than that for the external expansion bus connector
10 since the serial communication connector has only a
signal line.

According to the above method, however, the
high-speed input/output operation cannot be executed
by the communication using the serial communication
15 connector. Such a method can be used for only an
interface with a relatively low-speed external device
such as printer, analog modem, or the like. It is
difficult to apply the above method to an application
field such that the memory of the IC card of a small
20 capacity is expanded by connecting an external memory
or the like.

SUMMARY OF THE INVENTION

It is the first object of the invention that
25 even in a small electronic apparatus having a limited
installation space, the data input/output operation can
be executed at a high speed by using an IC card

1 interface.

The second object of the invention is to enable the input/output operation with an external device such as an external memory device or the like to be performed through pseudo card means connected under the same junction condition as that for the IC card connector.

BRIEF DESCRIPTION OF THE DRAWINGS

10 Fig. 1 is a perspective view showing an external view of a data processing apparatus employing the invention;

Fig. 2 is a block diagram of a control system of the apparatus of Fig. 1;

15 Fig. 3 is a diagram of a table showing a pin arrangement of a junction portion on the pseudo IC card side;

Fig. 4 is a flowchart showing the operation of the apparatus of Fig. 1;

20 Fig. 5 is an explanatory diagram showing a data construction to distinguish between an IC card and a pseudo IC card;

Fig. 6 is a block diagram showing an embodiment of a different control system of the electronic apparatus;

25 Fig. 7 is a perspective view showing a state in which the invention is applied to an electronic camera;

09312823 051799

1 Fig. 8 is a perspective view showing a
construction of a conventional electronic apparatus;
and

5 Fig. 9 is a block diagram showing a con-
struction of a control system of the conventional
electronic apparatus.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

10 The invention will be described in detail
hereinbelow on the basis of an embodiment shown in
the drawings. In the following description, the same
or corresponding members as those of the conventional
apparatus are designated by the same reference numerals
and their detailed descriptions are omitted.

15 According to the invention, an external device
(an expansion port of an external expansion memory
device such as floppy disk, hard disk device, semi-
conductor memory, etc., another apparatus such as
computer, word processor, etc., or the like) is
20 connected to the data processing apparatus 90 by
using an IC card interface.

 As shown in Fig. 1, in an electronic apparatus
using the invention, a pseudo IC card (second card)
1 is inserted into an IC card slot (inserting hole)
25 and used in place of the IC card (first card) 50.
The pseudo IC card 1 is constructed as a pseudo IC
card section. The CPU of the data processing

1 apparatus 90 executes the input/output operation to
the same interface as the ordinary IC card 50 for the
pseudo IC card 1, so that the CPU can perform the
input/output operation to an external device 11.

5 The pseudo IC card 1 has a cable 8 to execute
the input/output operation to the external device 11.
The cable 8 is connected to the external device 11
through connectors 9 and 10. In the above construction,
since the input/output interface between the pseudo IC
10 card 1 and the external device 11 can be executed
irrespective of the data processing apparatus 90 side,
it can be performed by arbitrary means such as an SCII
interface or the like.

 Explanation will now be made hereinbelow with
15 respect to an example in which the external device 11
is constructed as an external expansion memory device
such as floppy disk, hard disk device, semiconductor
memory, or the like and supplements the capacity of
the IC card and data is handled as if the apparent
20 capacity of the IC card when it is seen from the data
processing apparatus 90 increased.

 In Fig. 2, in a manner similar to the conven-
tional apparatus, the data processing apparatus 90 is
constructed by the display 68, power source section
25 84, and key input section 86 and has the IC card
connector 60 on the side wall of the apparatus main
body at a position adjacent to the key input section.

09312823 051799
667150 E28TE60

1 In a manner similar to the conventional
apparatus, internal circuits of the data processing
apparatus 90 comprise: the RAM 82 to store data or
utility softwares; the timer IC 81 which is used to
5 calculate an execution period or an operation time;
the key input controller 85 to convert a key input
code from the key input section 86 into a code in a
form which can be easily read by the CPU 65; the
display controller 66 to convert display characters
10 sent from the CPU 65 so as to be displayed by the
display 68 such as LCD or plasma display; the KANJI
(or Chinese characters) ROM 69 which is referred
as necessary to convert the display characters to the
display 68 into KANJI; the I/O controller 71 of a
15 communication control IC such as an RS232C or the like
for communication with the outside; the DMA controller
70 to control a DMA (direct memory access) from the
I/O controller 71; and the like.

20 The apparatus of the invention differs from
the conventional apparatus with respect to points that
the pseudo IC card 1 is not constructed so as to use
the self internal memory as in the IC card but has
an external device controller 4 to control the
input/output operation to the external device 11, an
25 I/O driver 5, a mold member 6 to connect the cable 8
and the I/O driver 5, and a monitor 7 to assure the
safety.

0943823-051799
657450-2287E60

1 A buffer 3 receives an input/output signal for
the apparatus main body from a junction portion 2 and
electrically protects the internal circuits. The
external device controller 4 converts the signal from
5 the buffer into a signal timing of the external device.
The I/O driver 5 is provided to execute the input/
output operation to the external device 11 by a
predetermined interface system (SCII or the like)
which can accurately perform the communication
10 between the external device controller 4 and the
external device 11 even when the cable 8 is long to a
certain extent.

 Further, the monitor 7 monitors a power
source voltage which is supplied from the data
15 processing apparatus 90 to the pseudo IC card 1 through
the junction portion 2 and gives a reset signal to the
external device controller 4 at a time point when the
power source voltage is lower than a predetermined
voltage, thereby preventing a runaway of the CPU.

20 Fig. 3 is a table diagram showing a pin
arrangement of two rows of the junction portion 2 of
the pseudo IC card 1 in order to connect the pseudo
IC card 1 with the data processing apparatus 90.
Numbers in the table indicate the pin numbers and
25 each signal name is shown by a code which is generally
used. For instance, GND indicates a ground potential;
 D_0 to D_n denote bits of the data bus; A_0 to A_n bits

05312823.051759

1 of the address bus; CS chip enable; and NC non-connection.

The operation in the above construction will now be explained with reference to Figs. 4 and 5.

5 Fig. 4 shows a control procedure of the data processing apparatus 90 by the CPU 65.

When a power source is turned on in step S1 in Fig. 4, the CPU 65 starts the execution of the operating system software of the data processing
10 apparatus stored in the ROM 83 and starts to check the function of each of the internal ICs.

In the next step S2, directory management data stored in the head address of the IC card 50 or pseudo IC card 1 as shown in Fig. 5 is read in order
15 to automatically discriminate whether the IC card has been connected or the pseudo IC card has been connected to the IC card connector 60.

Fig. 5 shows information for the CPU 65 to handle the IC card 50 or pseudo IC card 1 as a file.
20 Such information is stored into addresses 0 to 4 of the IC card 50 or pseudo IC card 1.

As shown in the diagram, different kinds of data are stored into those addresses by the IC card 50 or pseudo IC card 1.

25 Information (01 (hexadecimal notation) in the case where the device is an RAM card; 02 in the case of ROM card; F0 in the case of the pseudo IC card 1)

0014333 001759
0024330 0033350

1 indicative of the kind of IC card 50 or the dis-
tinguishment between the IC card 50 and the pseudo IC
card 1 is stored into address 0.

5 In the case of the IC card 50, words (stored
in addresses 1 and 2) indicative of the number of
registered files and words (stored in addresses 3 and
4) indicative of the head address of the first file
are stored into subsequent addresses 1 to 4. Necessary
file location information is stored into the sub-
10 sequent addresses.

 In the case of the pseudo IC card 1, the head
address of a device driver program to access to the
pseudo IC card 1 stored in the ROM 83 on the apparatus
main body side is stored into addresses 2 and 3.

15 In step S2, the data indicative of the kind
of device in address 0 is read and when the data kind
indicates the IC card, the processing routine advances
to steps S3 and S5. An ordinary IC card control driver
software written in the ROM 83 is loaded into the RAM
20 82. The CPU 65 sequentially executes programs stored
in the RAM 82 and controls a method of giving a signal
to the IC card connector and handles the IC card 50 as
an ROM card or an RAM card. The above operations are
substantially the same as those in the conventional
25 apparatus.

 On the other hand, in the case where the read
directory management data indicates the pseudo IC card

0034233 054799
0034233 054799

1 in step S2, step S4 follows and the device driver
program for the pseudo IC card control is loaded from
the ROM 83 into the RAM 82. After that, in the run
of the operating system in steps S6 to S8, the CPU
5 65 sequentially executes the programs in the RAM 82
and changes a method of giving signals to the IC card
connector 60 to a method of giving control signals
according to the kind of external device which is
connected.

10 On the pseudo IC card 1 side, a high-speed
communication by parallel transfer using the CPU
bus is executed between the data processing apparatus
90 and the CPU 65. The external device controller 4
executes the necessary data conversion or interface
15 conversion on the basis of the high-speed communi-
cation, thereby performing the input/output operation
to the external device 11.

As mentioned above, the electronic apparatus
can be used for expansion of an external memory or for
20 control of an external device by using the IC card
connecting portion of the data processing apparatus 90
through the pseudo IC card 1 in which the shape, signal
arrangement, and characteristics are the same as those
of the IC card section. Therefore, even in a small
25 data processing apparatus such that there is no
space enough to attach a connector terminal for
expansion of an external memory and only a slot

05342823:054759

1 (inserting hole) of an IC card can be arranged, the
transmission and reception of data with an external
device can be realized by the high-speed parallel
data transmission using the CPU bus.

5 In the above embodiment, the device driver
program to execute the input/output operation to/from
the pseudo IC card 1 is stored into the ROM 82 on the
data processing apparatus 90 side. As shown in Fig.
6, however, it is also possible to construct in a
10 manner such that an ROM 12 is provided for the pseudo
IC card 1 and a device driver program to execute the
interface which is peculiar to the pseudo IC card 1
is stored therein and is transferred to the RAM 82 on
the apparatus main body side at the start of the
15 program.

In the above case, when it is determined that
the pseudo IC card 1 is connected in the discrimination
about the device in step S2 in Fig. 4, for the access
procedure, the device driver program is loaded not
20 from the RAM 82 but from the ROM 12 in the pseudo IC
card 1 in step S4.

According to the above construction, a device
driver such that the use of the pseudo IC card 1 will
not be presumed in future doesn't need to be stored
25 into the main memory in vain. The main memory
comprising the ROM and RAM on the main body side of
the data processing apparatus 90 can be saved and

00312823 054759
002750 222750

1 effectively used.

Since the device driver program is stored in the pseudo IC card 1, the change and maintenance of the device driver program can be also easily performed.

5 Further, in the above embodiment, although the data processing apparatus has been considered as an electronic apparatus which handles characters such as word processor, note-shaped personal computer, electronic pocketbook, or the like, the invention is
10 also effective for all of apparatuses using an IC card such as electronic calculator which handles numerals, facsimile apparatus which handles a video image, electronic camera, and the like.

Fig. 7 shows a schematic diagram when the
15 invention is applied to an IC card camera. Fig. 7 shows an electronic camera which stores photographed images into the IC card 50. Reference numeral 202 denotes a flash to photograph and 203 indicates a lens to photograph. The other construction of the camera
20 mechanism is substantially the same as that of the conventional apparatus except a different point that in the control system of the camera, the portion which handles the interface of the IC card 50 is constructed as shown in Fig. 1 or 6 to thereby
25 enable the pseudo IC card 1 as mentioned above to be connected.

According to the above construction, the

09342823 051759
557150 223750

1 external device 11 can be connected through the pseudo
IC card 1 in place of the IC card 50 and the number
of photographed images of about tens of images can be
remarkably increased.

5 In the above embodiment, upon start of the
program, the discrimination between the pseudo IC card
1 and the IC card 50 and the setting of the device
driver are executed. Upon exchange of the pseudo
10 IC card 1 and IC card 50, the discrimination about
the device, the loading of the device driver, and the
like can be also dynamically performed.

Further, in the above embodiment, the pseudo
IC card 1 and the external device are connected by
using the cable. However, the cable is not an
15 indispensable element and the pseudo IC card 1 can be
also directly attached to the external device.

As will be obviously understood from the above
explanation, according to the invention, in an
electronic apparatus in which a detachable IC card is
20 connected to the IC card junction portion and the CPU
bus of the electronic apparatus main body is connected
to the IC card by the junction portion and the IC card
is used as an external memory device, there is provided
the pseudo card means having a junction portion which
25 can be connected to the IC card junction portion of the
electronic apparatus main body, and further, the pseudo
card means has therein the control means for converting

00313823 051799
66750 2281360

1 the data input/output interface between the electronic
apparatus and the pseudo card means and the data
input/output interface between a predetermined external
device and the pseudo card means, and the data input/
5 output operation is executed between the electronic
apparatus main body and the external device through
the pseudo card means. Therefore, there is an
excellent advantage such that even in a small data
processing apparatus in which the connector terminal
10 for expansion of an external memory cannot be
separately attached, the data input/output operation
can be executed between the apparatus main body and
an external device at a high speed by using the bus
of the IC card through the pseudo card means connected
15 to the IC card junction portion.

20

25

09340323 054799
00750 222250

1 WHAT IS CLAIMED IS:

1. An electronic apparatus comprising:

connecting means for detachably connecting a
first or second electronic circuit to an electronic
5 apparatus main body;

discriminating means for discriminating whether
the first electronic circuit or the second electronic
circuit has been connected to said connecting means;
and

10 means for executing transmission and reception
of information to or from a memory provided in the
first electronic circuit in the case where said
discriminating means discriminates that the first
electronic circuit has been connected and for
15 accessing data to an external device further connected
to the second electronic circuit through a control
circuit provided in the second electronic circuit in
the case where said discriminating means discriminates
that the second electronic circuit has been connected.

20

2. An apparatus according to claim 1, wherein
the first or second electronic circuit is formed in
the IC card and said connecting means is constructed
so as to permit the attachment of the IC card.

25

3. An apparatus according to claim 1, further
comprising means for allowing the data input/output

00342823 051799
667150 2232760

1 operation to be executed between the second electronic
circuit and the external device on the basis of a
predetermined communication interface system.

5 4. An apparatus according to claim 2, further
comprising means for allowing the data input/output
operation to be executed between the second electronic
circuit and the external device on the basis of a
predetermined communication interface system.

10

5. An electronic apparatus comprising:
attaching means for freely inserting or
ejecting first or second card into or from an
electronic apparatus main body;
15 discriminating means for discriminating whether
the first card or the second card has been attached to
said attaching means or not; and
means for executing transmission and reception
of information to or from a memory provided in the
20 first card in the case where said discriminating means
discriminates that the first card has been attached
and for accessing data to an external device further
connected to the second card through a control
circuit provided in the second card in the case where
25 said discriminating means discriminates that the second
card has been attached.

00312823 051799

1 6. An apparatus according to claim 5, wherein
the electronic apparatus main body is constructed by
an electronic apparatus which handles characters such
as word processor, personal computer, or electronic
5 pocketnote.

 7. An apparatus according to claim 5, wherein
the electronic apparatus main body is constructed by
an electronic apparatus which handles numerals such as
10 an electronic calculator.

 8. An apparatus according to claim 5, wherein
the electronic apparatus main body is constructed by
an electronic apparatus which handles a video image
15 such as facsimile apparatus or electronic camera.

20

25

00412823 MS1799
66/150 E2B2TE60

1 ABSTRACT OF THE DISCLOSURE

 There is provided an electronic apparatus which
also enables the data input/output apparatus to be
executed at a high speed to a small electronic apparatus
5 having a limited installation space by using an IC card
interface. In an electronic apparatus in which a
detachable IC card is connected to an IC card junction
portion and a CPU bus of the electronic apparatus main
body is connected to the IC card by the junction portion
10 and the IC card is used as an external memory device,
there is provided pseudo card means having a junction
portion which can be connected to the IC card junction
portion of the electronic apparatus main body, and
further, the pseudo card means has control means for
15 converting the data input/output interface between the
electronic apparatus and the pseudo card means and the
data input/output interface between a predetermined
external apparatus and the pseudo card means, wherein
the data input/output operation can be executed between
20 the apparatus main body and the external device at a
high speed by using the bus of the IC card through the
pseudo card means connected to the IC card junction
portion.

25

0041222 051799
667530 2282160

FIG. 1

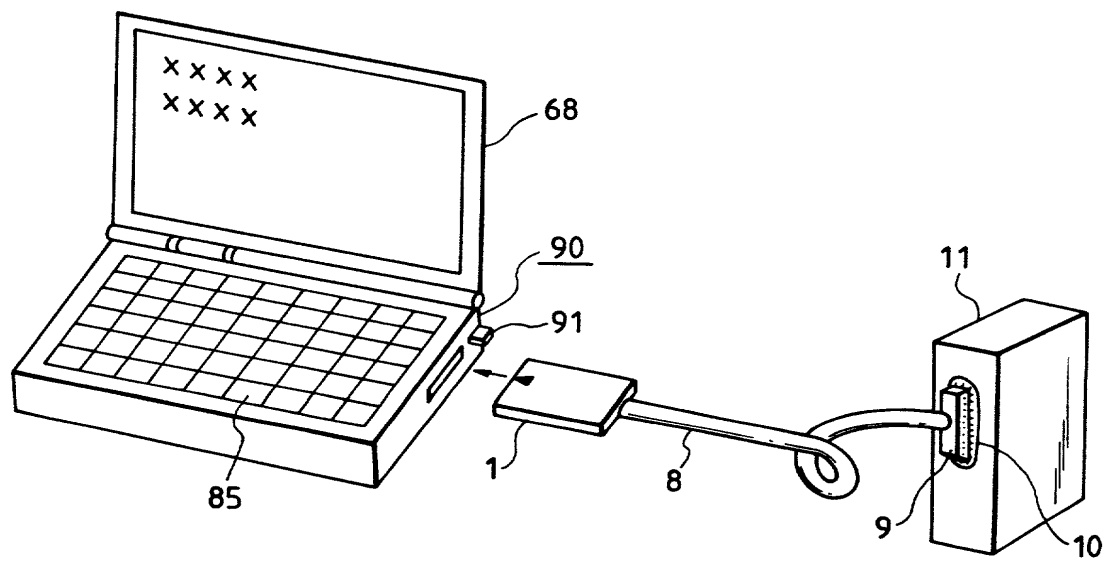


FIG. 2

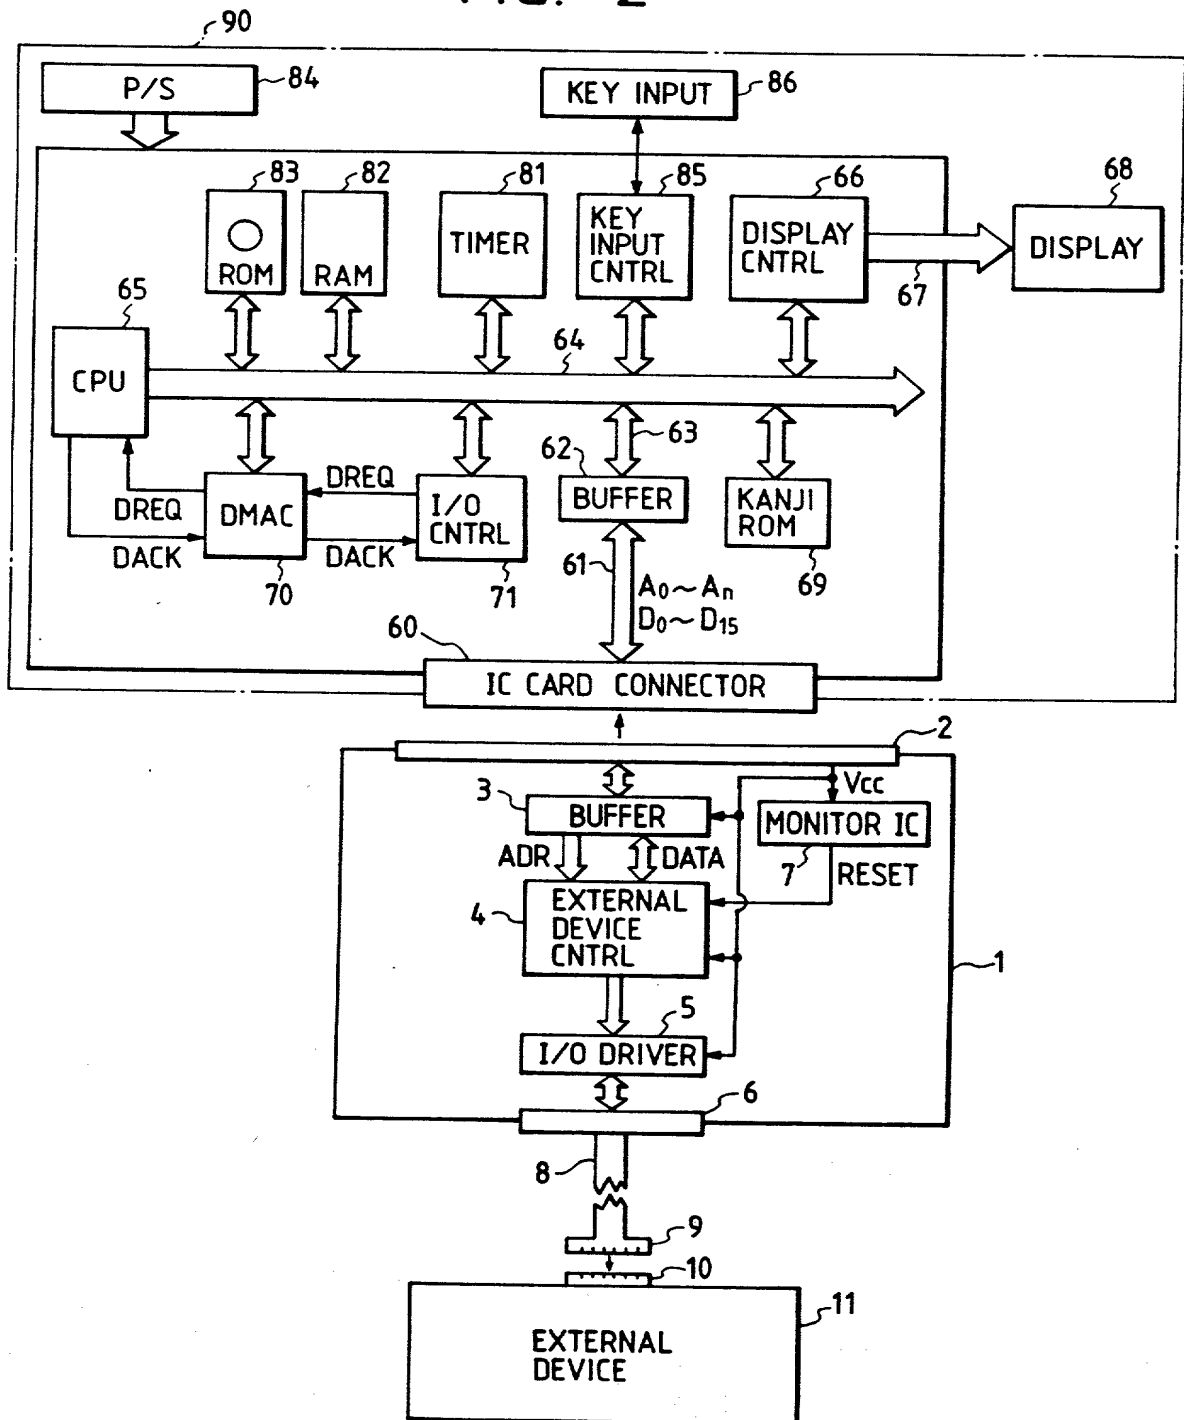


FIG. 3

1ST ROW				2ND ROW			
NO.	SIGNAL	NO.	SIGNAL	NO.	SIGNAL	NO.	SIGNAL
1	GND	18	NC	35	GND	52	NC
2	D ₃	19	A ₁₆	36	$\overline{\text{LP}}_1$	53	NC
3	D ₄	20	A ₁₅	37	NC	54	NC
4	D ₅	21	A ₁₂	38	NC	55	*NC
5	D ₆	22	A ₇	39	NC	56	*NC
6	D ₇	23	A ₆	40	NC	57	*NC
7	$\overline{\text{CS}}_1$	24	A ₅	41	NC	58	NC
8	A ₁₀	25	A ₄	42	NC	59	NC
9	$\overline{\text{OE}}$	26	A ₃	43	NC	60	*NC
10	A ₁₁	27	A ₂	44	NC	61	*NC
11	A ₉	28	A ₁	45	CST	62	*NC
12	A ₈	29	A ₀	46	A ₁₇	63	BAT
13	A ₁₃	30	D ₀	47	A ₁₈	64	NC
14	A ₁₄	31	D ₁	48	A ₁₉	65	NC
15	R/ $\overline{\text{W}}$	32	D ₂	49	NC	66	NC
16	NC	33	WF	50	NC	67	$\overline{\text{LP}}_2$
17	V _{cc}	34	GND	51	V _{cc}	68	GND

FIG. 4

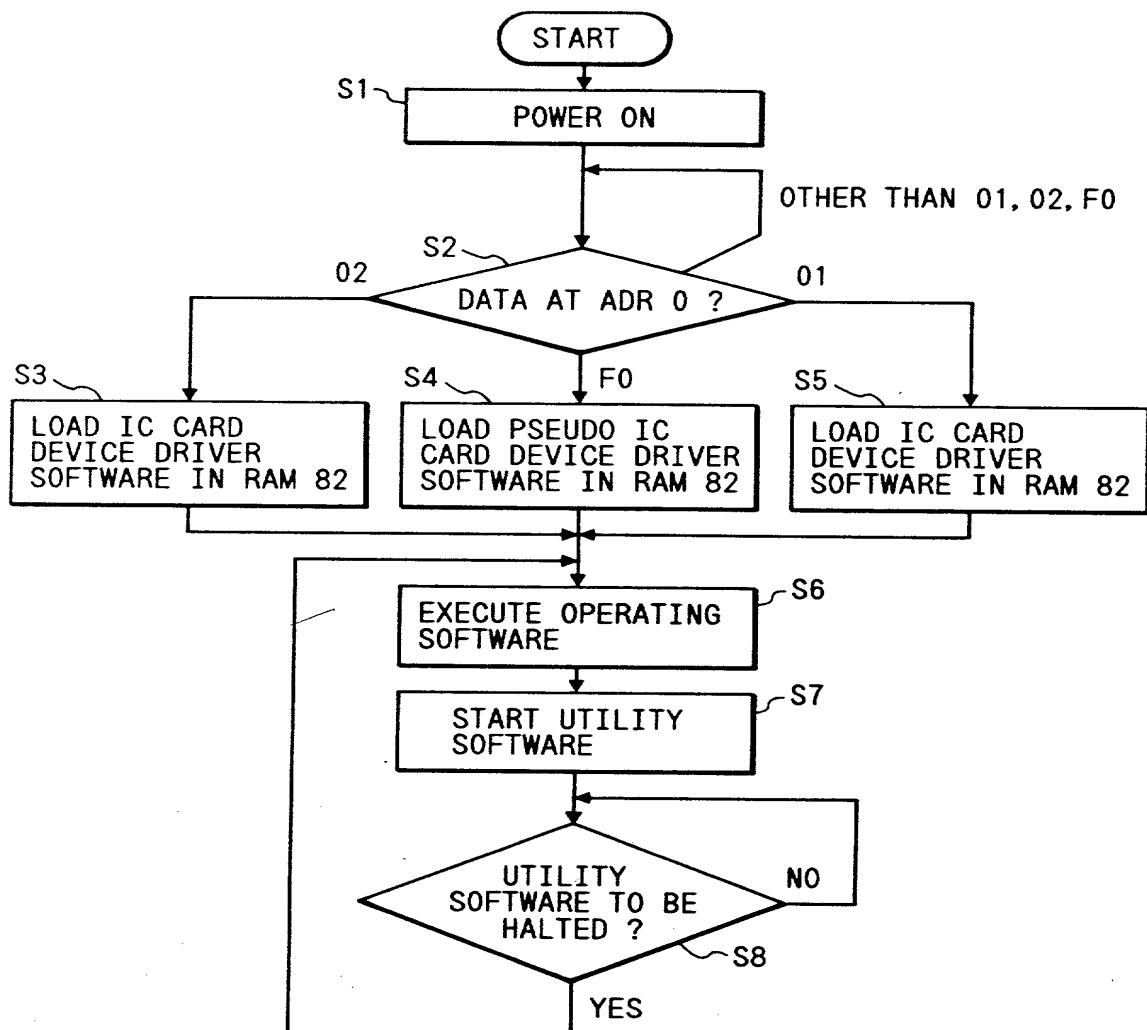


FIG. 5

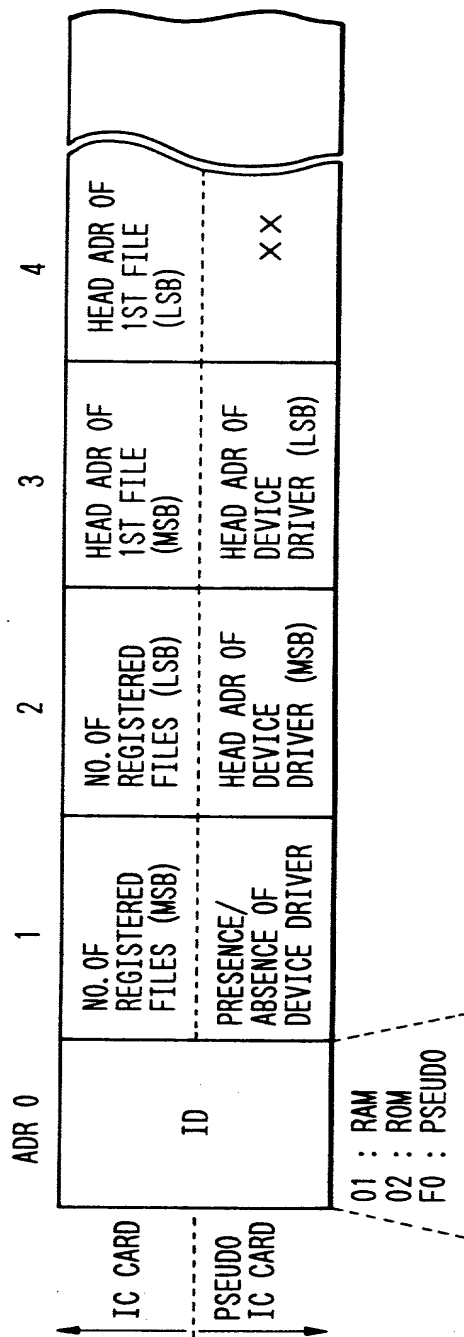


FIG. 6

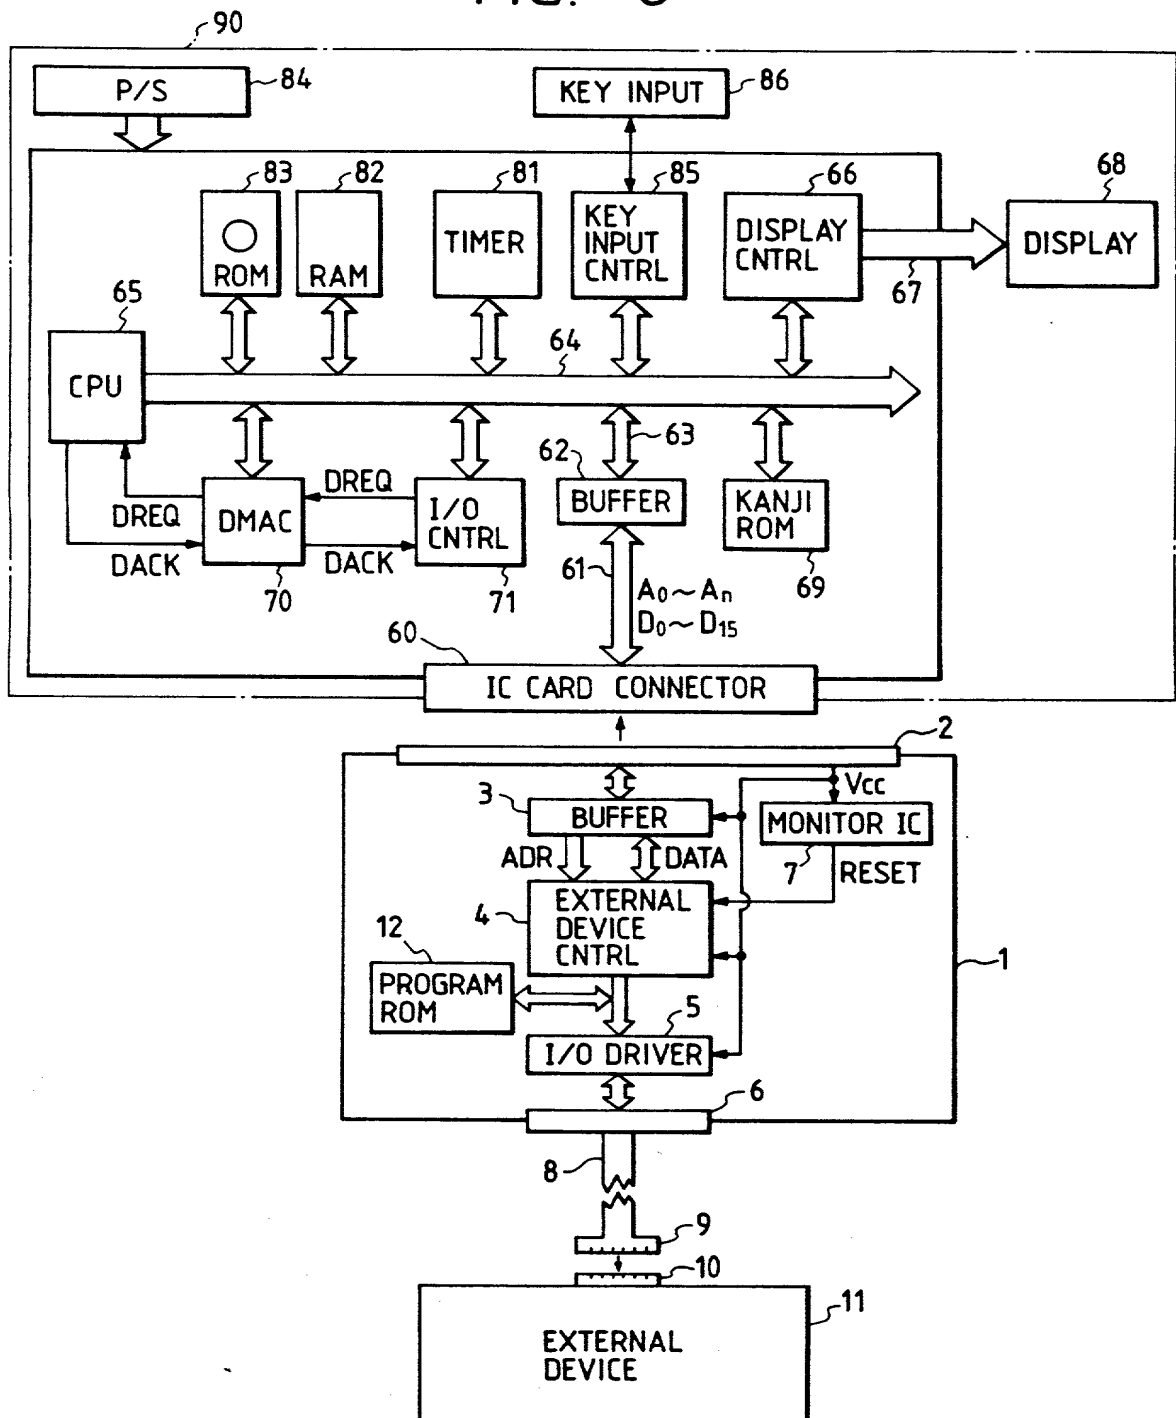


FIG. 7

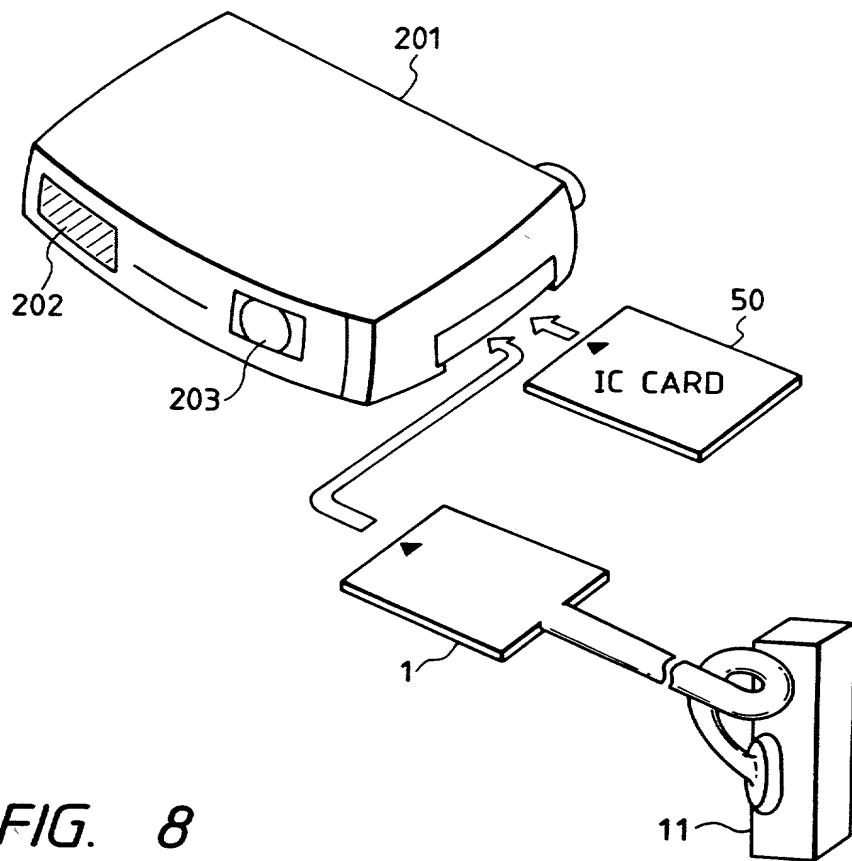


FIG. 8


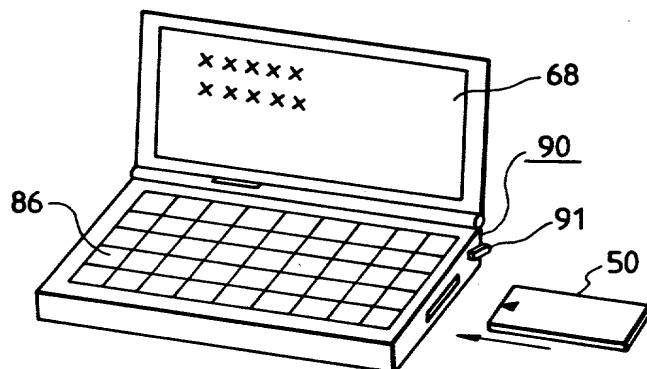


FIG. 9

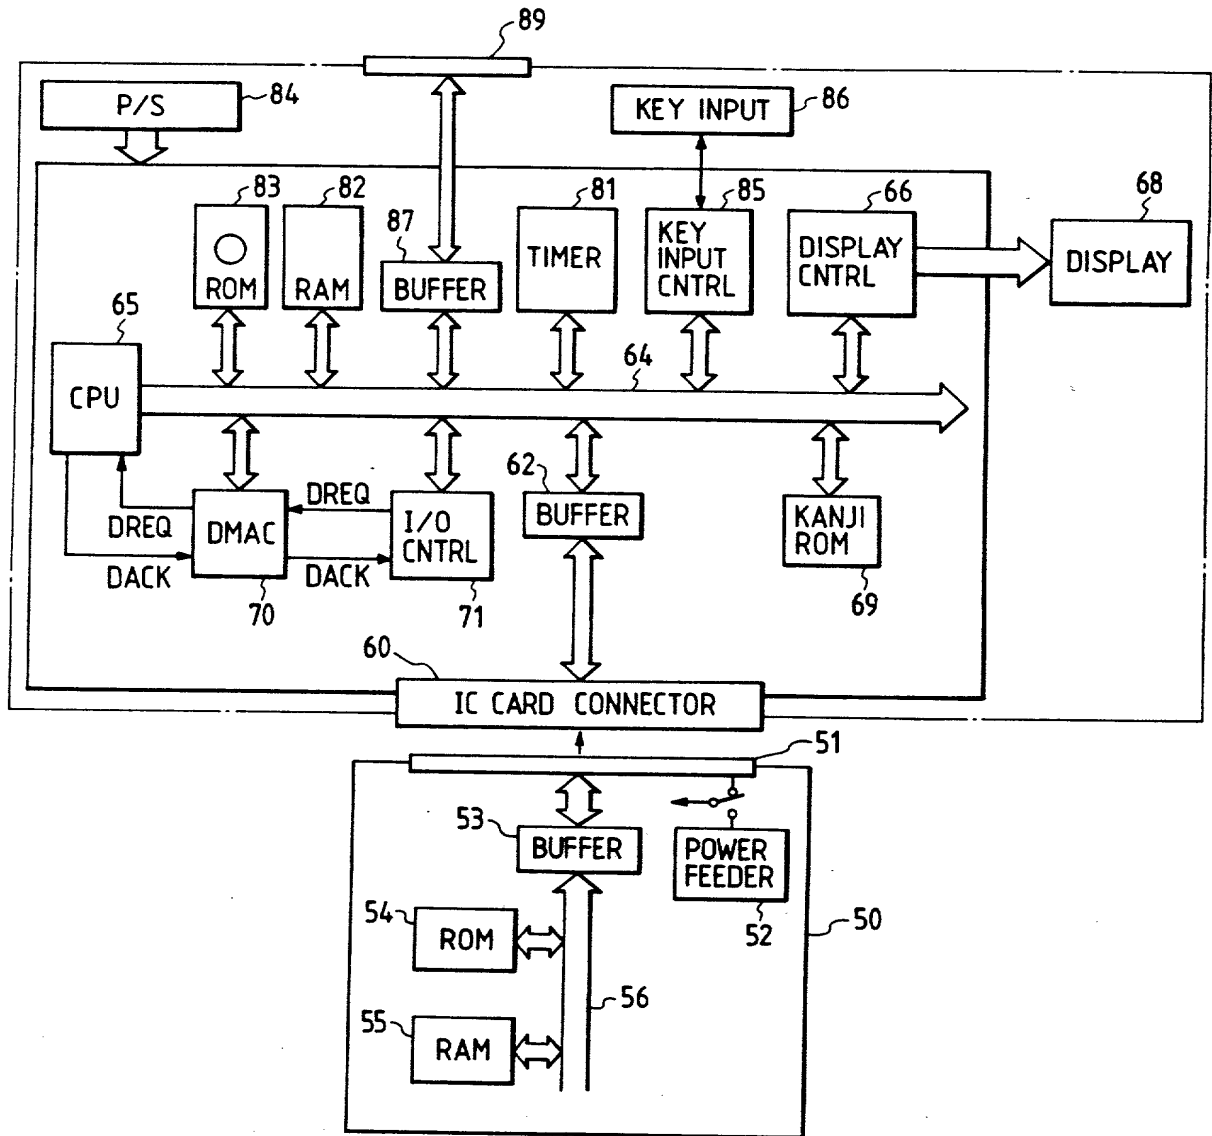

09312823.051799

FIG. 7



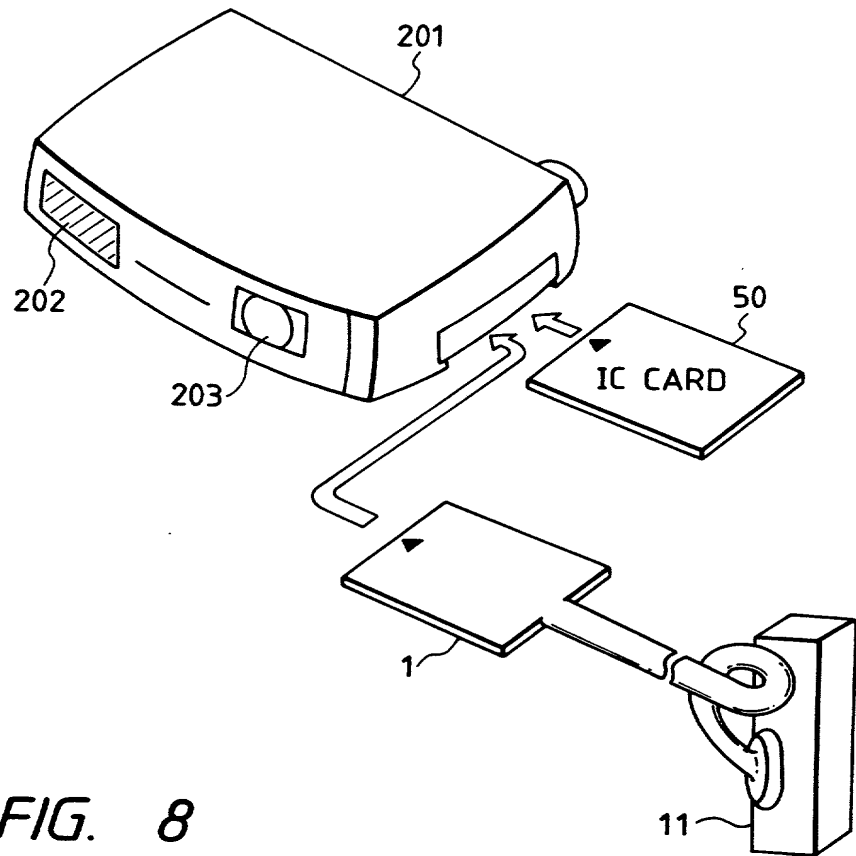


FIG. 8

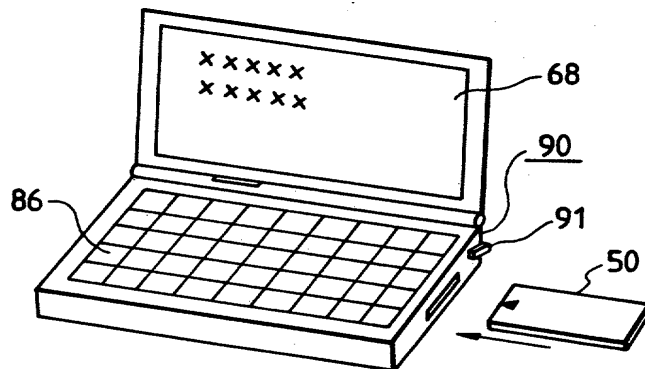

PRIOR
ART

Prior Art
FIG. 9

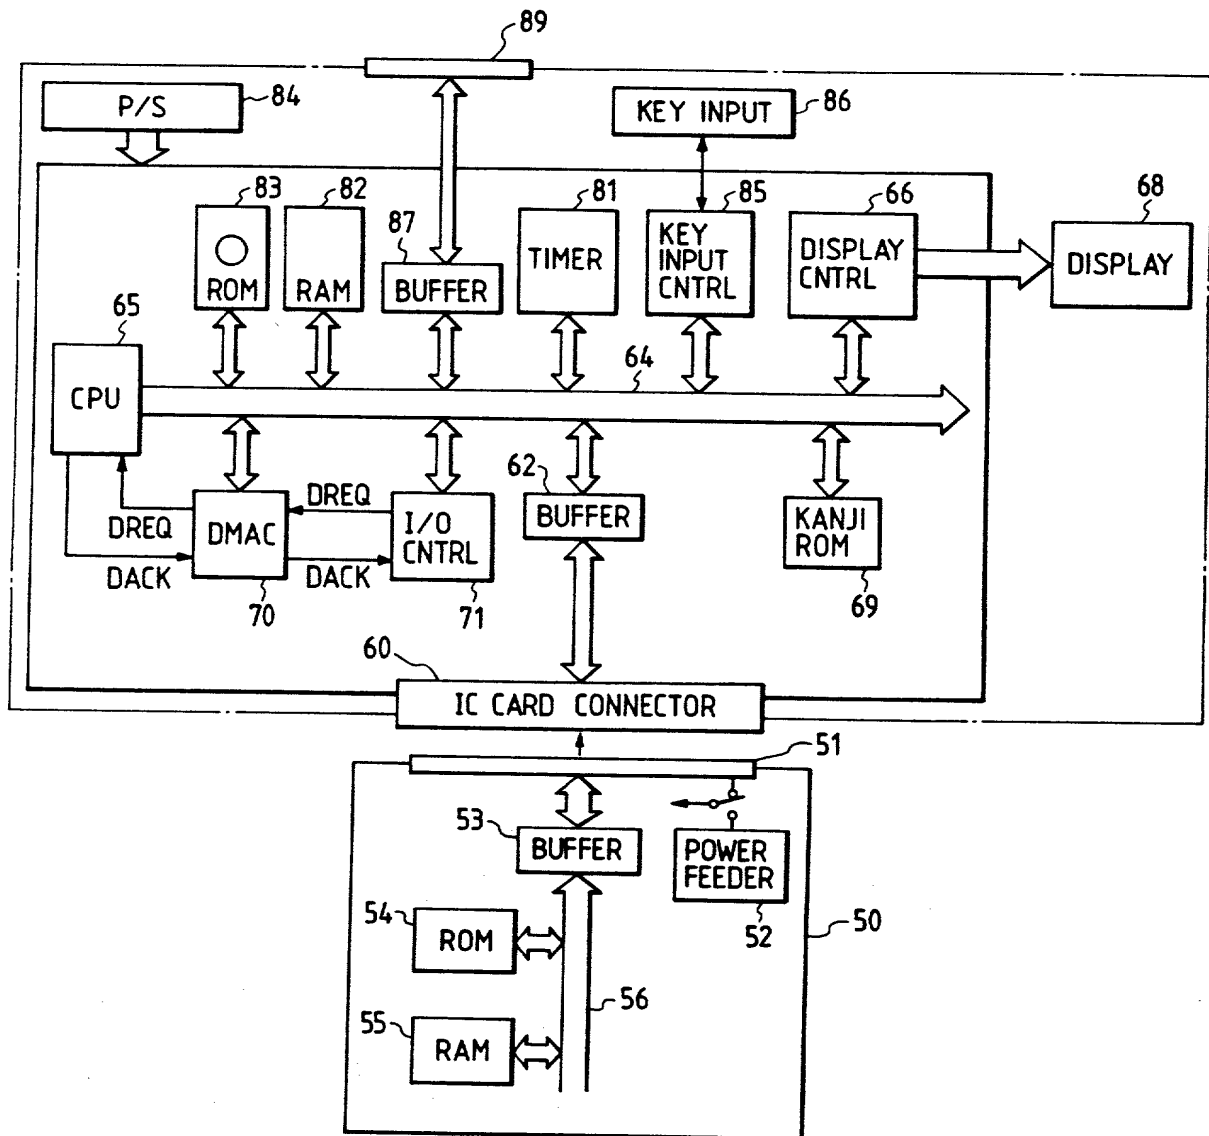

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ELECTRONIC APPARATUS
HAVING CONNECTING MEANS, the specification of which

☒ is attached hereto. ☐ was filed on _____ as Application

Serial No. _____

and was amended _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	Priority Claimed (Yes/No)
JAPAN	2-401447	12 December 1990	YES

I hereby appoint Joseph M. Fitzpatrick (Registration No. 17,398), Lawrence F. Scinto (Registration No. 18,973), William J. Brunet (Registration No. 20,452), Robert L. Baechtold (Registration No. 20,860), John A. O'Brien (Registration No. 24,367), Nels T. Lippert (Registration No. 25,888), John A. Krause (Registration No. 24,613), Henry J. Renk (Registration No. 25,499), Peter Saxon (Registration No. 24,947), Anthony M. Zupcic (Registration No. 27,276), Charles P. Baker (Registration No. 26,702), Stevan J. Bosses (Registration No. 22,291), Edward E. Vassallo (Registration No. 29,117), Ronald A. Clayton (Registration No. 26,718), Lawrence A. Stahl (Registration No. 30,110), Laura A. Bauer (Registration No. 29,767), Leonard P. Diana (Registration No. 29,296), David M. Quinlan (Registration No. 26,641), Nicholas N. Kallas (Registration No. 31,530), William M. Wannisky (Registration No. 28,373), Lawrence Alaburda (Registration No. 31,583), Lawrence S. Perry (Registration No. 31,865), Robert H. Fischer (Registration No. 30,051), Christopher Philip Wrist (Registration No. 32,078), Gary M. Jacobs (Registration No. 28,861), Michael K. O'Neill (Registration No. 32,622), Bruce C. Haas (Registration No. 32,734), Scott K. Reed (Registration No. 32,433), Scott D. Malpede (Registration No. 32,533), John A. Mitchell (Registration No. 19,032), Fredrick M. Zullo (Registration No. 32,452), Richard P. Bauer (Registration No. 31,588), Eric B. Janofsky (Registration No. 30,759), Warren E. Olsen (Registration No. 27,290), Abigail F. Cousins (Registration No. 29,292), Alan W. Fiedler (Registration No. 33,690), Jennifer A. Tegfeldt (Registration No. 31,310), Steven E. Warner (Registration No. 33,326), Thomas J. O'Connell (Registration No. 33,202), Aaron C. Deditch (Registration No. 33,865), Penina Wollman (Registration No. 30,816), David L. Schaeffer (Registration No. 32,716), Jack S. Cubert (Registration No. 24,245), Mark A. Williamson (Registration No. 33,628), John T. Whelan (Registration No. 32,448), Patricia M. Drost (Registration No. 29,790), Jean K. Dudek (Registration No. 30,938), Raymond R. Mandra (Registration No. 34,382) and Dominick A. Conde (Registration No. 33,856), my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all correspondence to:

FITZPATRICK, CELLA, HARPER & SCINTO
277 Park Avenue
New York, N.Y. 10172
Telephone No. (212) 758-2400

004383-051790

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

(Page 2)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor TOMISHIGE TAGUCHI
Inventor's signature *Tomishige Taguchi*
Date December 4, 1991 Citizen/Subject of JAPAN
Residence Urawa-shi, Saitama-ken, Japan
Post Office Address c/o Canon Kabushiki Kaisha
30-2, 3-chome, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Second Joint Inventor, if any _____
Second Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Third Joint Inventor, if any _____
Third Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Fourth Joint Inventor, if any _____
Fourth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Fifth Joint Inventor, if any _____
Fifth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Sixth Joint Inventor, if any _____
Sixth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

0942823 054799